CC900G

Light Tandem Rollers



DYNAPAC
FAYAT GROUP

TECHNICAL DATA

Technical data

Compaction

Centrifugal force	3,754 lbf
Static linear load, front	5 lb/in
Static linear load, rear	7 lb/in

Hydraulic system

Driving	Axial piston pump with variable displacement. 2 radial piston motors with constant displacement.
Parking/emergency brake	Failsafe multidisc brake in both drums.
Service brake	Hydrostatic in forward and reverse lever.
Steering	Gear pump with constant displacement

Drum

Drum width	35 in
Split drums	No

Weights

Front module weight	1,202 lb
Max operating weight	2,866 lb
Rear module weight	1,550 lb

Fluids

Fuel tank	6 US gal
Hydraulic tank	3 US gal
Hydraulic, oil in system	5 US gal

Standards and certifications

Guaranteed Sound power level, LwA	102 dB

Drive

Speed, transport	5 mph

Speed

Speed, working	4 mph

Steering

Steering Angle	34 °
Turning Radius, inside	71 in
Turning Radius, outside	106 in

Traction

Vertical oscillation	6 °

Spray system

Water tank volume	50 US gal


Engine

Emission	Stage V/Tier 4f
Manufacturer	Honda
Model	GX630RHX-QYD
Rated power	12 kW (16,1 hp) @ 3,600
Rated power according to standard	SAE J1349
Type	Air cooled 4-stroke OHV petrol engine

Dimensions


SIDE VIEW

A	53 in	Wheelbase
C	18 in	Curb Clearance
D	23 in	Drum Diameter
H1	91 in	Height, ROPS
H2	62 in	Height, folded ROPS
K	10 in	Ground clearance
L	83 in	Length
S	0 in	Drum shell thickness

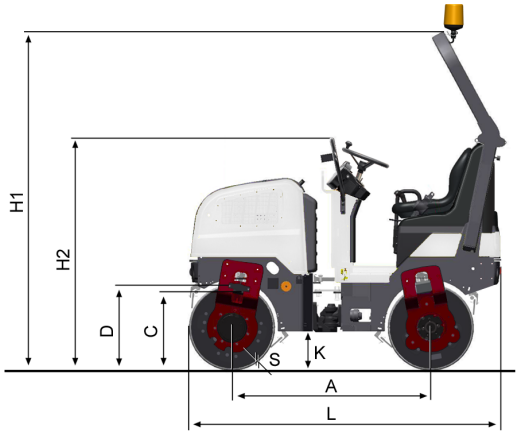

TOP VIEW

B1	38 in	Width
O1	1 in	Overhang, left
O2	1 in	Overhang, right
R1	106 in	Turning Radius, outside
R2	71 in	Turning Radius, inside
α	34 °	Steering Angle

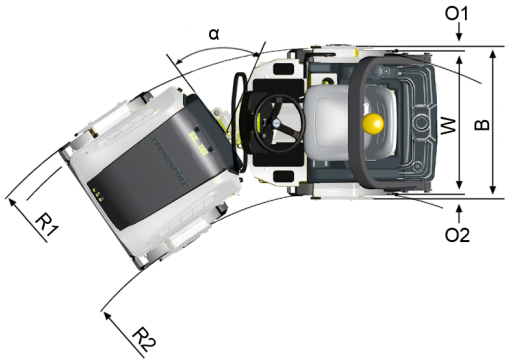

Questions?

We're happy to help

Find your closest dealer at dynapac.com

