XD25 90C

Highway Pavers



www.bdtlib.com

DYNAPAC
FAYAT GROUP

TECHNICAL DATA

Technical data

Auger

Adjustable auger height	250 mm
Auger control	Independent proportional with sonic sensors
Auger diameter	430 mm
Auger type	Center drive, reversible
Auger wing, type	Separately replaceable

Capacity

Maximum basic working width	6000 mm
Maximum working width	12000 mm
Minimum basic working width	2550 mm
Minimum working width	2550 mm
Paving thickness, max	360 mm
Paving thickness, min	-150 mm

Conveyor

Conveyor control	Proportional with paddle sensor
Conveyor type	Dual conveyor, reversible
Conveyor width	25.7
Conveyor width	655

Dimension Machine

Dumping height	525 mm
Internal hopper width	3290 mm
Working width	2550 mm

Dimension Transport

Transport dimension, length	6150 mm
Transport dimension, width	2550 mm

Drive

Undercarriage type	Crawler

Engine

Emission	Stage V
Manufacturer	Cummins
Model	Cummins B6.7-C225
Rated power	168 kW
Rated power according to standard	SAE J1995
Type	Water Cooled Turbo Diesel

Fluids

Fuel tank	362 liter

Masses

Weight, basic	22000 kg
Weight, Max	29500 kg

Speed

Speed, transport	4 kmh

Undercarriage


Crawler length	3360 mm

www.pafin.com

Dimensions


SIDE VIEW

L3	2600 mm	Length, hopper
A	3360 mm	Axle track
L1	6630 mm	Length
H2	3100 mm	Transport dimension, height

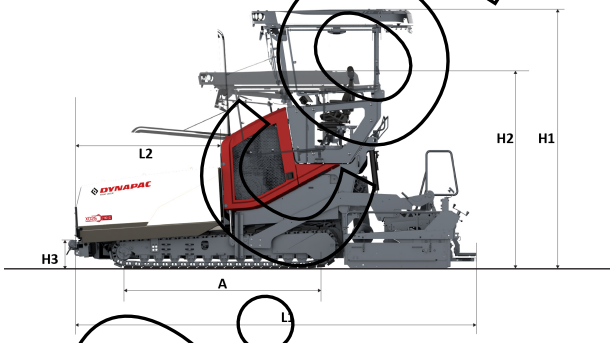

FRONT VIEW

B1	3470 mm	Width, max
B2	2550 mm	Width
C1	320 mm	Crawler width

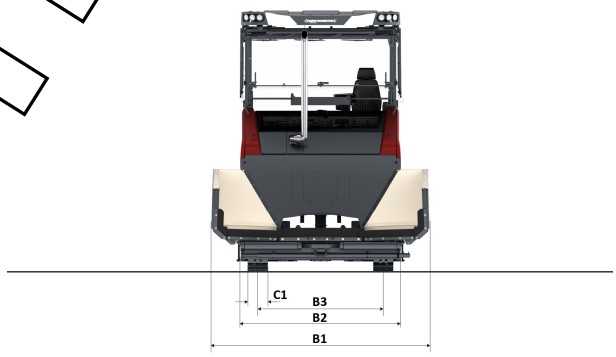

www.pdflib.com

Questions?

We're happy to help

Find your closest dealer at dynapac.com