CO5200 VI

Heavy Tandem Rollers - Articulated



DYNAPAC
FAYAT GROUP

TECHNICAL DATA

Technical data

Compaction

Centrifugal force, high amplitude	23,830 lbf
Centrifugal force, high amplitude	32,372 lbf
Centrifugal force, low amplitude	15,287 lbf
Centrifugal force, low amplitude	20,907 lbf
Centrifugal force, oscillation	32,148 lbf
Nominal amplitude, High	0.0311 in
Nominal amplitude, Low	0.011 in
Oscillation	2,400 vpm
Static linear load, front	30 lb/in
Static linear load, rear	30 lb/in
Vibration, high amplitude	3,060 vpm
Vibration, low amplitude	4,020 vpm

Hydraulic system

Driving	Axial piston pump with variable displacem. Rad. piston motors(2) with variable displacem.
Parking/emergency brake	Failsafe multidisc brake in both drums.
Service brake	Hydrostatic in forward and reverse lever.
Steering	Gear pump with constant displacement

Drum

Drum width	66 in
Split drums	No

Weights

Front module weight	13,007 lb
Max operating weight	32,606 lb
Rear module weight	12,787 lb

Fluids

Fuel tank	48 US gal
Hydraulic, oil in system	20 US gal

Standards and certifications

Guaranteed Sound power level, LwA	108 dB

Offset

Off-set	20 in

Drive

Speed, transport	7 mph

Speed

Speed, working	4 mph

Steering

Steering Angle	32 °
Turning Radius with off-set, inside	143 in
Turning Radius, inside	215 in
Turning Radius, outside	292 in

Traction

Vertical oscillation	7 °

Spray system

Water tank volume	225 US gal

Dimension Machine

Working width	66 in

Engine

Emission	Stage IIIA/Tier 3
Manufacturer	Cummins
Model	QSF 3.8
Rated power	104 kW (140 hp) @ 2200 rpm
Rated power according to standard	SAE J1995
Type	Water cooled turbo diesel


Engine

Emission	Stage V/Tier 4f
Manufacturer	Cummins
Model	F3.8
Rated power	100 kW (135 hp) @ 2,200 rpm
Rated power according to standard	SAE J1995
Type	Water cooled turbo diesel

Dimensions


SIDE VIEW

A	148 in	Wheelbase
C	32 in	Curb Clearance
D	48 in	Drum Diameter
H1	118 in	Height
K	12 in	Ground clearance
L	199 in	Length
S	1 in	Drum shell thickness

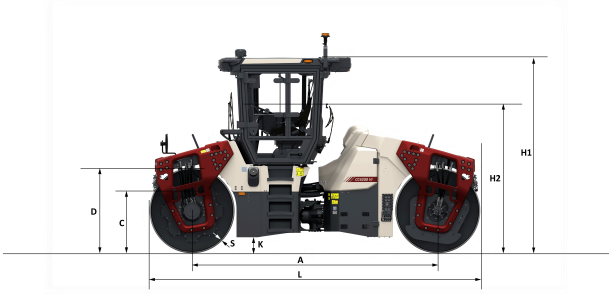

TOP VIEW

B2	95 in	Width, assymetric cab
O1	20 in	Off-set
R1	292 in	Turning Radius, outside
R2	215 in	Turning Radius, inside
R3	220 in	Turning Radius with off-set, outside
R4	143 in	Turning Radius with off-set, inside
W	66 in	Drum width
α	32 °	Steering Angle

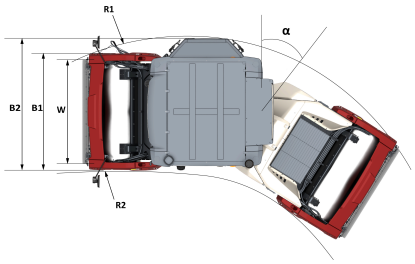

Questions?

We're happy to help

Find your closest dealer at dynapac.com

